

HOLE GRID VACUUM TABLE


SAV 249.02GR

Use :

For clamping parts during dry or wet machining
Tapped holes also allow the holding of vices, assembly
or the integration of stops

Features :

- Table in aluminum drilled with pitch of 10x10mm
- Diameter of holes 5/0,3mm
- M8 steel threaded bushings with pitch of 100x100 mm
- Pipe of external diameter 12mm
- Clamping by flanges all around

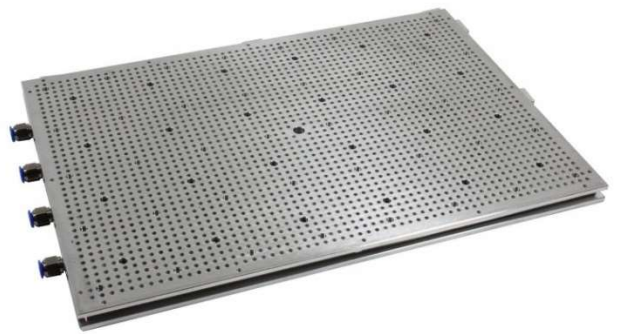


Standard delivery:

- 1 vacuum table + connectors
- 1 supply pipe
- 1 martyr plate

Dimensions in mm					Number vacuum port	Weight in kg
Active length	Active width	Total length	Total width	Height		
200	120	216	136	26	1	1,8
200	200	216	216	26	2	3,0
300	200	316	216	26	2	4,3
300	300	316	316	26	3	6,4
400	200	416	216	26	2	5,6
400	300	416	316	26	3	8,5
400	400	416	416	26	4	11,2
500	200	516	216	26	2	7,0
500	300	516	316	26	3	11,0
500	400	516	416	26	4	14,1
500	500	516	516	26	5	17,7
600	300	616	316	26	3	12,8
600	400	616	416	26	4	16,9
600	500	616	516	26	5	21,0
600	600	616	616	26	6	25,0
700	300	716	316	26	3	14,8
700	500	716	516	26	5	25,0
800	400	816	416	26	4	22,5
800	500	816	516	26	5	28,1
800	600	816	616	26	6	33,6
1000	300	1016	316	26	3	22,0
1000	400	1016	416	26	4	28,1
1000	500	1016	516	26	5	35,0
1000	600	1016	616	26	6	42,0
1000	800	1016	816	26	8	56,1
1000	1000	1016	1016	26	10	69,8
1000	1500	1016	1516	26	15	104,5
1000	2000	1016	2016	26	20	139,0
1200	600	1216	616	26	6	50,5

* All dimensions on inquiry

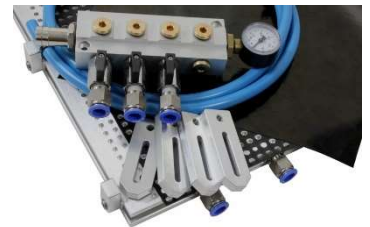

Example of order:

Hole grid vacuum chuck
Designation

SAV 249.02GR - 600 x 400
SAV N° - dimension